



MAC

► High Efficiency Wall Mounted Modulating Condensing Boiler

(Combi & Space Heating Models)

- 95% AFUE
- Featuring AI (Artificial Intelligence) Control Technology
 - Recognizes Natural or LP Gas
 - Self-Monitors and adjusts for fuel savings
 - Automatic Commissioning
- 7:1 Turndown Ratio in DHW Mode
- 5.7:1 Turndown Ratio in Heating Mode
- Primary/Secondary Manifold Included
- Warranty Coverage
 - 10-Year Limited Heat Exchanger
 - FREE 2-Year Parts & Labor Limited Warranty*
- Built by American Craftsmen since 1928



**Unit must be registered within 60 days from the date of original installation, All terms of Trinity Extended Service Agreement apply.*



There are some things you can always depend on...



www.uticaboilers.com



MAC

The Utica MAC High Efficiency Condensing Boiler uses **AI** Control Technology. The **AI** Control self commissions and continuously calibrates to ensure maximum efficiency at all times making it the clear choice for consumers looking for the next level in innovative technology.

The **AI** control measures water temperature, flue gas temperature, flame signal, and pressure that can impact the boiler operation and CO levels. The **AI** control will automatically shut down operation should these values exceed normal operating levels. This provides added protection for you and your family.



Here at Utica Boilers, we pride ourselves on safety. Though the **AI** control indirectly monitors CO levels and acts accordingly, it is not a replacement for a CO Detector in your home.

Modulation Ratio (7:1 DHW mode, 5.7:1 Heating mode)

AI Control automatically modulates the gas input to the burner. During times when the domestic hot water or heating demand is high, the control increases the amount of gas in order to meet the requirement. During times when the load demand is less, the **AI** control decreases the gas input to only use the amount of fuel necessary.

The MAC Combi model adjusts the firing rate from a high of 153 MBH, down to a low of 22

MBH during a call for DHW. During a call for central heating, both the MAC and the MAH models adjust the firing rate from a high of 125 MBH down to a low of 22 MBH.

AI modulation saves energy by reducing the amount of gas used. Homeowners enjoy comfort, energy savings, and lower utility bills! By automatically modulating the gas input to the heating level that is needed, the boiler system operates at optimum efficiency, resulting in savings for you.

Control Display




- Digital Control with Graphic Display
- Boiler Status
- Temperature Display
- Diagnostics
- Automatically Adjusts for Fuel Type and Continuous Calibration

The MAC is an *Intelligent Condensing approach* to residential heat and domestic hot water.



COMBI MODEL

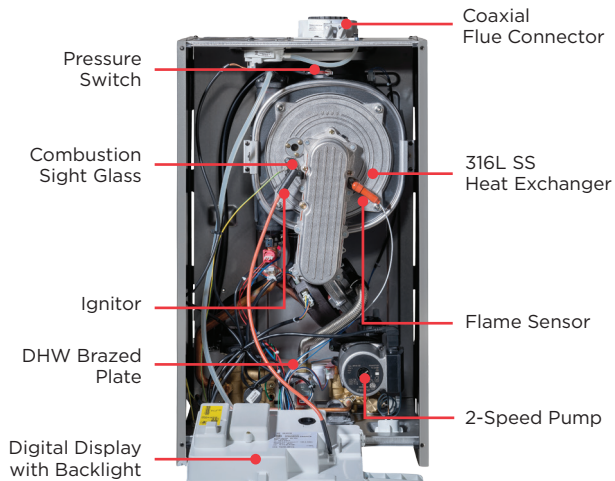


- 7:1 Gas Modulation in Combi Mode
- 5.7:1 Gas Modulation in Heating Mode
- Auto Commissioning and Continuous Calibration functions optimize combustion and result in lower fuel bills
- Features 316L Stainless Steel Heat Exchanger and Burner
- Features such as, high limit sensors, pressure relief valve, low water sensor, and system pressure gauge ensure safety and top performance of the unit
- Control Panel features a backlit digital display that indicates boiler status, temperature, and diagnostics
- Pre-heat function
- Built in 2-speed Pump contributes to savings in electrical usage

HEATING ONLY MODEL




HEATING MODEL WITH OPTIONAL INDIRECT TANK


Our **AI** control technology is programmed to recognize an Indirect Tank. Utica Boilers H2O Indirect Hot Water Heaters are available in 30 to 115 gallon capacities and feature 316L stainless steel construction and top connections for an easy installation.

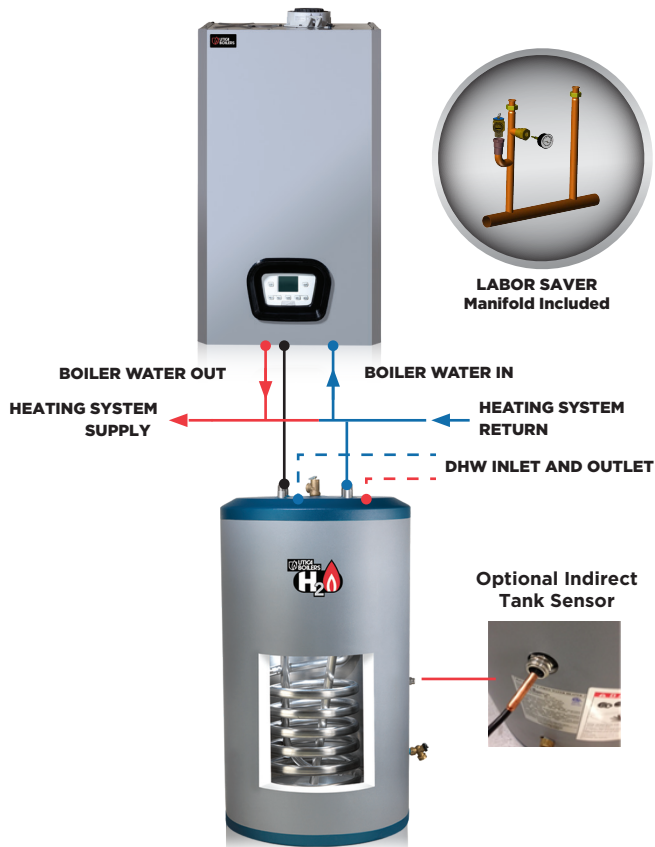


TOP OF BOILER - BOTH MODELS

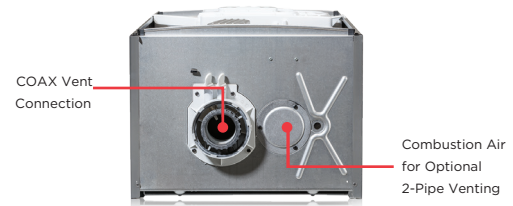



BOTTOM OF BOILER - HEATING ONLY MODEL

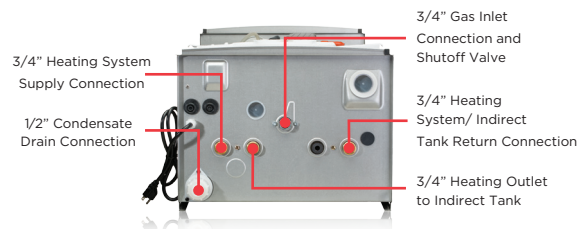

BOTTOM OF BOILER - COMBI MODEL

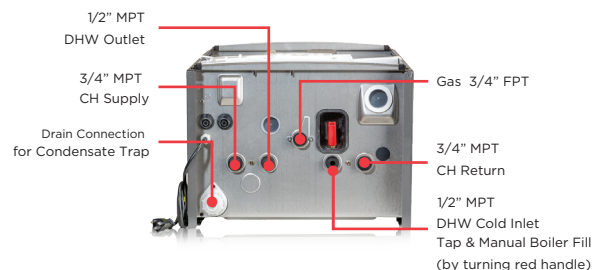

The piping connections on the boiler are all straight thread and not tapered. The required adapters are supplied with the boiler for field installation.

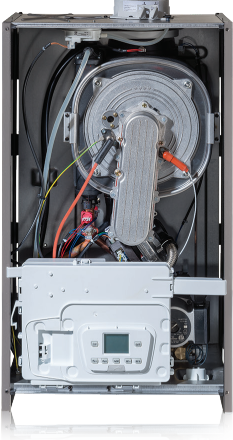Dimensional Diagram		Model	Input Rate (MBH) 0-2000 ft.	Heating Capacity (MBH) 0-2000 ft.	Net Rating, Water (MBH) ⁽¹⁾ 0-2000 ft.	Vent Diameter O.D. Coaxial ⁽²⁾	Vent Diameter 2-pipe ⁽²⁾	AFUE
MAC Unit See IOM for dimensions on other models. TOP Width 17-23/32" Depth 13 - 19/32"  FRONT Height 30" 	Space Heating Only	MAH-125 Heating Only	125	113	98	3.93"	3"	95%
	Combi	MAC-150 Heating Mode	125	113	98	3.93"	3"	95%
		MAC-150 DHW Mode	153	136	N/A			
(1) Net Water Ratings shown based on piping and pickup allowance of 1.15. Consult manufacturer before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc. (2) Refer to IOM and vent pipe manufacturer's instructions for equivalent lengths and approved venting materials.								
General Information (See Installation, Operation and Maintenance Manual for complete instructions)								
Clearances (2) Required distances measured from boiler. (3) Service, proper operation clearance recommendation.	Top	Combustible Materials (Required) ⁽²⁾			Service ^{(2) (3)}			
		0" (0 cm)			8.66" (22 cm)			
		Left Side			1.77" (4.5 cm)			
		Right Side			1.77" (4.5 cm)			
		Front			1.57" (4.0 cm)			
		Back			0" (0 cm)			
		Bottom			9.84" (25 cm)			
		Combustion Air/Vent Piping			0" (0 cm) N/A			
Connections MAC-150 & MAH-125		3/4" SWT Adapters Heating System Supply & Return, Gas Connection 3/4" FPT						
Connections MAC-150 DHW		1/2" SWT Adapters Domestic Hot Water (DHW) Inlet & Outlet						
Electrical		120 Volts AC, 60 hertz, 1 phase, Less than 12 amps (15 amp circuit recommended)						
Water Content		125/150: 0.95 Gallons						
Dimensions/Weights	Model	Width	Height	Depth	Weight			
	MAC-150	17-23/32"	30"	13-19/32"	103			
	MAH-125 Heating Only	17-23/32"	30"	13-19/32"	102			
Standard Equipment		-LABOR SAVER Manifold -Boiler Control Module: High Limit/Electronic Ignition Control. -User Display Interface: Digital Temperature Display with diagnostics and programmable settings. -Heat Exchanger: Stainless Steel -3-Way Water Diverting Valve -Combustion: Automatically modulating gas valve with 5.7:1 Turndown for Heating Mode & 7:1 for DHW Mode, Stainless Steel Burner, Direct Spark Ignition, Separate Flame Sensor, 100% shutoff -Other: Assembled Boiler with Jacket, Induced Draft Fan, Circulator Pump, 30psi Relief Valve, Low Water Pressure Switch, Air Pressure Switch, Temperature/Pressure Gauge MAC-150 DHW Model: Stainless Steel Brazed Plate Heat Exchanger with 3.5 GPM flow rate @ 70° F rise						
Options		Outdoor Temperature Sensor, Indirect Tank Sensor, Floor Stand Kit					PN 240011407 Rev 9/17	
Certifications		AHRI CERTIFIED™ www.ahridirectory.org CSA US DESIGN STAR CERTIFIED ASME H Tested for 43.5 psi. ASME Maximum Allowable Working Pressure						



ECR International Inc. 2201 Dwyer Avenue, Utica, NY 13501
 Tel. 800 253 7900
www.ecrinternational.com

All specifications subject to change without notice.
 ©2018 ECR International, Inc.
 PN 240011407 REV. [01/2018]