



SVB Series II

There Are Some Things You Can Always Depend On...



SVB

Up to 84.4% AFUE Gas Fired Hot Water Boiler


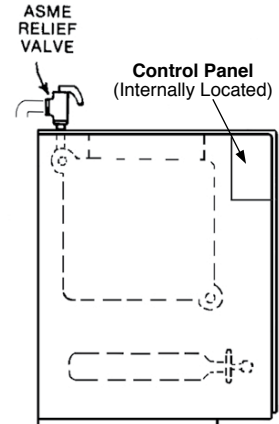
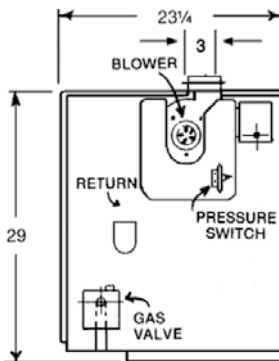
- Available in 6 sizes from 42 MBH to 225 MBH.
- Dependable Cast Iron Heat Exchanger with Cast Iron Push Nipples. The Sections and Push Nipples expand at the same rate when heated. By using similar materials instead of less expensive gaskets the boiler maintains a water tight seal over time.
- Honeywell 2012 Compliant High Limit/Electronic Ignition Control.
 - Recessed under the boiler's protective jacket
 - Digital temperature display and diagnostics
 - Plug in connection for the inducer fan
 - Plug in connection for the system pump

Control monitors the water temperature and delays the burner starting until residual heat has been transferred. This maximizes efficiency by turning on the burner only when needed.

- Induced Draft Fan - allows flue gases to be pulled through the boiler and exhausted through a chimney or side-wall vent.
- Textured paint Jacket. Small compact design is ideal for low clearance installations.
- Limited Lifetime Warranty (Residential Applications)
- Made in the USA



Utica SVB Series II Gas Fired Hot Water Boiler

Dimensional Diagram	Model	Input Rate (MBH) ⁽¹⁾	Heating Capacity (MBH) ⁽¹⁾	Net AHRI Rating, Water (MBH) ⁽²⁾	Vent Diameter		AFUE %
					To Chimney ⁽³⁾ (Category I)	Horizontal Vent (Category III)	
	SVB-2	42	36	31	4"	3"	84.4%
	SVB-3	75	63	55	4"	3"	83.4%
	SVB-4	112	94	82	4"	3"	83.0%
	SVB-5	150	125	109	4"	3"	82.7%
	SVB-6	187	155	135	4"	4"	82.3%
	SVB-7	225	186	162	4"	4"	82.0%
	(1) Input rating for sea level to 2,000 ft. (610m) above sea level. United States, over 2000 ft (610m) above sea level. Reduce input rate 4% for every 1000 ft (304m) above sea level. (2) Net AHRI Water Ratings shown based on piping and pickup allowance of 1.15. Consult manufacturer before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc. For forced hot water systems where boiler and all piping within area to be heated, boiler may be selected on basis of its heating capacity. (3) Boiler is provided with a 3" x 4" increaser for chimney vent applications. This does not infer that the connection to the chimney will always be 4". Please refer to IOM, National Fuel Gas Code, ANSI Z223.1/NFPA54, or applicable provisions of the local building codes for details concerning proper chimney connections.						
General Information (See Installation, Operation and Maintenance Manual for complete instructions)							
	Clearances (4) Required distances measured from boiler. *Definition of Alcove is three sided space with no wall in front of boiler. ANSI standard for alcove is 18 inches from appliance to leading edge of side walls as shown in IOM.	Combustible Materials (Required) ⁽⁴⁾					
		Top	6" (152 mm)				
		Left Side	6" (152 mm)				
		Right Side (Control Side)	8" (203 mm)				
		Front	Alcove*				
		Back	6" (152 mm)				
		Flue Connector	6" (152 mm)				
Connections (All Models)		Return/Supply Water 1-1/4", Gas In 1/2" NPT					
Electrical		120 Volts AC, 60 hertz, 1 phase, Less than 12 amps (15 amp circuit recommended)					
Water Content		SVB-2 - 1.75 Gallons, SVB-3 - 3.00 Gallons, SVB-4 - 4.25 Gallons, SVB-5 - 5.50 Gallons, SVB-6 - 6.75 Gallons, SVB-7 - 8.00 Gallons					
	Dimensions/Weights	Model	A (Width)	B (Height)	C (Depth)	Weight	
		SVB-2	11"	29"	23-1/4"	225 lbs.	
		SVB-3	14-1/4"	29"	23-1/4"	265 lbs.	
		SVB-4	17-1/2"	29"	23-1/4"	322 lbs.	
		SVB-5	20-3/4"	29"	23-1/4"	370 lbs.	
		SVB-6	24"	29"	23-1/4"	431 lbs.	
		SVB-7	27-1/4"	29"	23-1/4"	480 lbs.	
Standard Equipment		Boiler Control Module: Recessed Honeywell 2012 Compliant Control (High Limit/Electronic Ignition Control). User Display Interface: Digital Temperature Display. Heat Exchanger: Cast Iron Sections with Cast Iron Push Nipples. Combustion: Completely Installed and Wired Gas Control System with Titanium Composite Burners and Manifold consisting of: Automatic Redundant Combination Gas Valve, 24 Volt Intermittent Pilot Control, Continuous Retry 100% Shut Off, Combination Pilot Burner/Electrode/Flame Sensor. Electrical: 24 Volt Transformer, Service Switch. Safety: Flame Roll-Out Safety Shut-Off (Fuse Link) and Pressure Switch (vent safety shutoff) with Spare Fuse Link included. Other: Assembled Boiler with Insulated Jacket, Induced Draft Fan, Combination Temperature/Pressure Gauge, Circulator Pump, 3/4" Drain Valve, 30lb. ASME Relief Valve.					
Options		Natural Gas or Propane, Combustible Floor Plate, Fill-Trol, Thimble, Sidewall Vent Hood					
Certifications		 C.S.A. Certified For Natural Gas Or Propane US ASME H Tested for 100 psi ASME Working Pressure					

All ratings and specifications subject to change.

PN 240009708 Rev. 10/12

Contractor
Assistance: 800.325.5479



P.O. Box 4729
Utica, New York 13504
tel: 315.797.1310 • fax: 315.797.3762
www.uticaboilers.com

