




UB90-100 IV

▶ 90% AFUE Gas-Fired Condensing Hot Water Boiler

- High Efficiency Cast Aluminum Heat Exchanger
- Fuel Smart Hydrostat Control:
 - Temperature Limit
 - Low Water Cut Off (LWCO)
 - Boiler Reset
- Compact Design
- Stainless Steel Premix Burner
- Induced Draft Blower
- FREE 2-Year Parts & Labor Warranty*

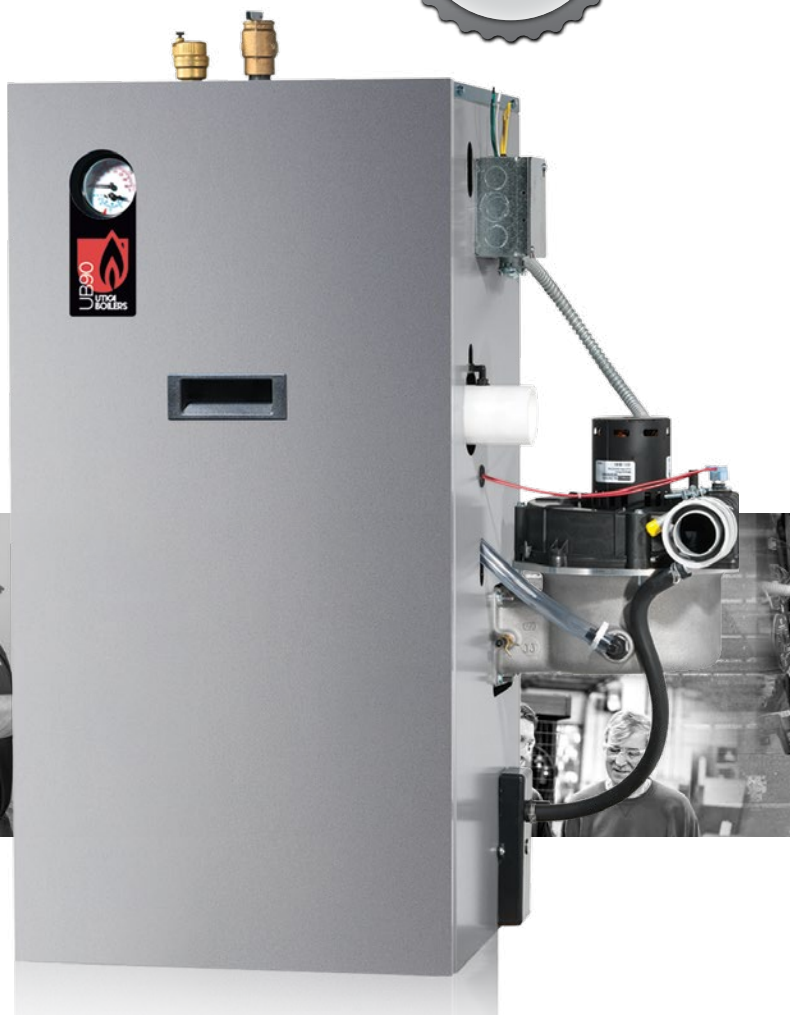

*Unit must be registered within 60 days from the date of original installation. All terms of Trinity Extended Service Agreement apply.



There are some things you can always depend on...



www.utica boilers.com

Utica UB90-100 IV Natural or Propane Gas-Fired Condensing Boiler

Dimensions/Weights		Model	Boiler Input Rate (MBH) ⁽¹⁾	Heating Capacity (MBH) ⁽¹⁾⁽²⁾	Net AHRI Rating, Water (MBH) ⁽¹⁾⁽³⁾	AFUE % ⁽²⁾
Front Top Right Left		UB90-050	50	45	39	90.0%
		UB90-075	75	68	59	90.0%
		UB90-100	100	90	78	90.0%
		(1) 1000 Btu/hr (British Thermal Units Per Hour)				
(2) Heating Capacity and AFUE (Annual Fuel Utilization Efficiency) are based on DOE (Department of Energy) test procedures.						
(3) Net AHRI Ratings based on piping and pickup allowance of 1.15. Contact Technical Support before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.						
General Information (See Installation, Operation and Maintenance Manual for complete instructions)						
Clearances (4) Required distances measured from boiler. (5) Service, proper operation clearance recommendation.	Top	Combustible Materials (Required) ⁽⁴⁾		Service ⁽⁵⁾		
	Left Side	1" (26 mm)		8" (204 mm)		
	Right Side	1" (26 mm)		N/A		
	Base	11" (280 mm)		N/A		
	Front	1" (26 mm)		N/A		
	Back	1" (26 mm)		24" (610 mm)		
	Combustion Air/Vent Piping	1" (26 mm)		N/A		
	Combustion Air & Vent Pipe Equivalent Length (Schedule 40 PVC)	0" (0 mm)		N/A		
Connections	Return/Supply Water	Gas In	2" Pipe 050/075	2" Pipe 100	3" Pipe 050/075	3" Pipe 100
	050/075/100	1-1/4" NPT	1/2" NPT	2 Ft. (0.61 m)	20 Ft. (6.09 m)	15 Ft. (4.57 m)
	Electrical	120 Volts AC, 60 hertz, 1 phase, Less than 12 amps (15 amp circuit recommended)				
Water Content	050/075/100 - 2.6 Gallons					
Standard Equipment	Note: Refer to IOM and vent pipe manufacturer's instructions for equivalent vent lengths and alternate venting materials.					
Options	Condensate Drain					
Model	Ship Wgt.	Natural Gas or Propane				
UB90-050	220 lbs. (100 kg)	Certifications				
UB90-075	220 lbs. (100 kg)	50 psi MAWP				
UB90-100	220 lbs. (100 kg)	50 psi MAWP				

All ratings and specifications subject to change.

PN 240005079 Rev. 4/17



ECR International: 2201 Dwyer Ave., Utica, NY 13501 Tel: 315-797-1310
or 800-325-5479 Fax: 315-724-9319 www.ecrinternational.com

In Canada: Contact ECR Master Representative: Morden National Sales and Marketing Inc. Tel: 519-627-0791 Fax: 866-835-6667 www.mordennational.com

